

UŽKLAUSIMAS



+370 5 23 06 183

Standartai:

DIN 7504-K
ISO 15480, ISO 2702

B
CINKUOTA
DANGA
SU BALTU
PASIVAVIMU

Padengimo tipas:

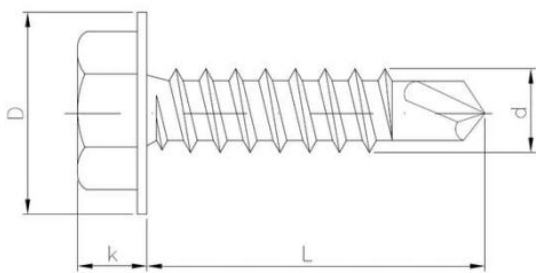

Matmenys

Material index	d [mm]	L [mm]	D [mm]	k [mm]	s [mm]	Padengimo tipas
23030480500BWT	4.8	50	10.5	4.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030480450BWT	4.8	45	10.5	4.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030550750BWT	5.5	75	11.0	5.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030550320BWT	5.5	32	11.0	5.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030420190BWT	4.2	19	8.8	4.25	7.0	B (cinkuota danga su baltu pasyvavimu)
23030480250BWT	4.8	25	10.5	4.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030550500BWT	5.5	50	11.0	5.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030630250BWT	6.3	25	13.2	6.45	10.0	B (cinkuota danga su baltu pasyvavimu)
23030630630BWT	6.3	63	13.2	6.45	10.0	B (cinkuota danga su baltu pasyvavimu)
23030420380BWT	4.2	38	8.8	4.25	7.0	B (cinkuota danga su baltu pasyvavimu)
23030480130BWT	4.8	13	10.5	4.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030630190BWT	6.3	19	13.2	6.45	10.0	B (cinkuota danga su baltu pasyvavimu)
23030420160BWT	4.2	16	8.8	4.25	7.0	B (cinkuota danga su baltu pasyvavimu)
23030550220BWT	5.5	22	11.0	5.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030480160BWT	4.8	16	10.5	4.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030480190BWT	4.8	19	10.5	4.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030630500BWT	6.3	50	13.2	6.45	10.0	B (cinkuota danga su baltu pasyvavimu)
23030480320BWT	4.8	32	10.5	4.45	8.0	B (cinkuota danga su baltu pasyvavimu)

Material index	d [mm]	L [mm]	D [mm]	k [mm]	s [mm]	Padengimo tipas
23030550450BWT	5.5	45	11.0	5.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030630380BWT	6.3	38	13.2	6.45	10.0	B (cinkuota danga su baltu pasyvavimu)
23030420320BWT	4.2	32	8.8	4.25	7.0	B (cinkuota danga su baltu pasyvavimu)
23030630220BWT	6.3	22	13.2	6.45	10.0	B (cinkuota danga su baltu pasyvavimu)
23030420130BWT	4.2	13	8.8	4.25	7.0	B (cinkuota danga su baltu pasyvavimu)
23030420250BWT	4.2	25	8.8	4.25	7.0	B (cinkuota danga su baltu pasyvavimu)
23030630750BWT	6.3	75	13.2	6.45	10.0	B (cinkuota danga su baltu pasyvavimu)
23030550630BWT	5.5	63	11.0	5.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030550380BWT	5.5	38	11.0	5.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030550250BWT	5.5	25	11.0	5.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030480380BWT	4.8	38	10.5	4.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030350190BWT	3.5	19	8.3	3.45	5.5	B (cinkuota danga su baltu pasyvavimu)
23030630320BWT	6.3	32	13.2	6.45	10.0	B (cinkuota danga su baltu pasyvavimu)
23030630450BWT	6.3	45	13.2	6.45	10.0	B (cinkuota danga su baltu pasyvavimu)
23030480220BWT	4.8	22	10.5	4.45	8.0	B (cinkuota danga su baltu pasyvavimu)
23030550190BWT	5.5	19	11.0	5.45	8.0	B (cinkuota danga su baltu pasyvavimu)